

Rooftop Delivery Requirement Checklist

Please review every item on the list with the contractor and/or homeowner. Check it off as you go, **make any notes that might be relevant.**

- () 13' of ground clearance from wires, trees, etc. is needed at the entrance and throughout our traveling distance of the driveway.
 - () No overhead obstructions in the unloading area - trees and or wires.
 - () Must have 23' minimum side (width) clearance for outriggers. Deployed outriggers could potentially end up on neighboring property.
 - () The truck must be on a level surface from side to side. Mechanical safety features will not allow for operation of the crane if outriggers cannot be leveled.
 - () The truck is 35' long, we need to be off the road.
 - () Someone must be at the job site and ready to unload - 15 minute maximum wait time or the load goes on the ground. Roof must be loaded in a reasonable time frame relative to quantity being delivered. Time frame is at driver's discretion.
 - () No dumpsters, trailers or other obstructions between driveway and structure. The boom has a 40'-50' horizontal reach, obstructions between the driveway and structure limit the ability to reach the roof.
 - () We will not drive on a lawn without the property owners' written permission (see separate form)
- ROOF TOP DELIVERY IS SOLELY AT THE DISCRETION OF THE LICENSED OPERATOR! NO EXCEPTIONS!**



**8' TOTAL FOR TRUCK WIDTH
23' MINIMUM FOR OUTRIGGERS**

35' TOTAL LENGTH

MOBILE CRANE HAND SIGNALS



**LOWER
INFERIOR**



**HOIST
IZADOR**



**RAISE BOOM
SUBA EL BRAZO**




**LOWER BOOM
BRAZO INFERIOR**



**SWING
DETENGA**



**RETRACT BOOM
REPLIEGUE EL BRAZO**

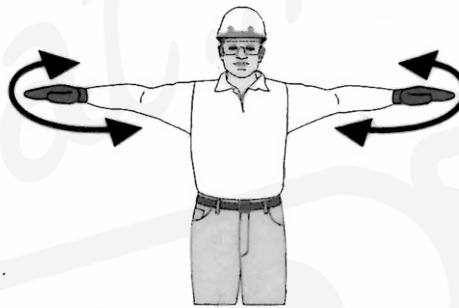

**STOP
EMERGENCIA**



**EXTEND BOOM
EXTIENDA EL BRAZO**



9531 RIVER ROAD, MARCY • (315) 733-6797
5963 COURT STREET ROAD, SYRACUSE • (315) 461-9177
www.SunriseBuildingSupply.com